
G24 - SINGLE GLAZED PARTITION

TECHNICAL DATA SHEET


DESCRIPTION

- GlassLine **G-24 Single glazed partition** using **12mm thick Normal Clear Toughened Glass** on 28x24mm Top & Bottom channels in tape glass to glass joint.
- Channels on Standard RAL powder coated finish / Exact Finish TBA
- Partition Height: 3000mmH


Acoustic Rating: Rw33dB

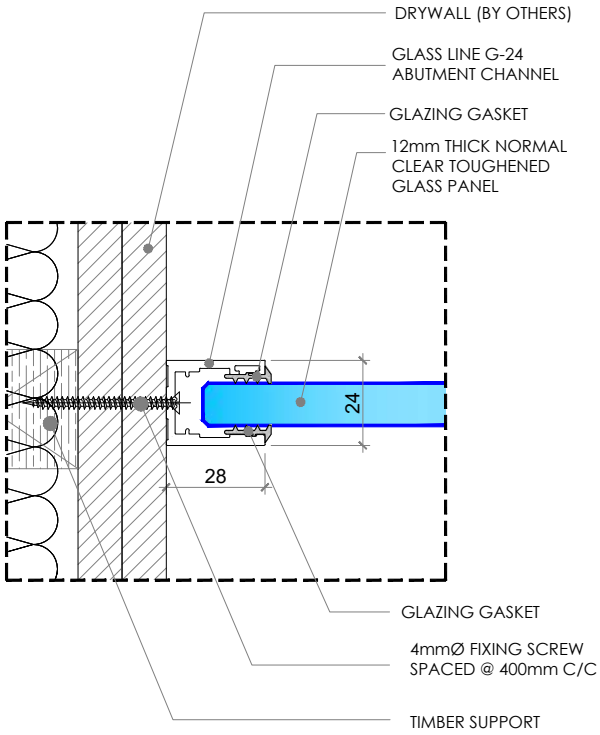

ABUTMENT TO DRYWALL

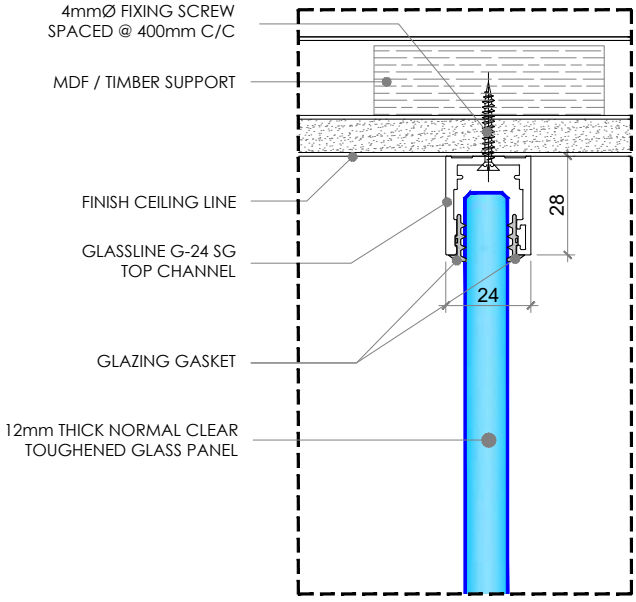

TOP SECTION

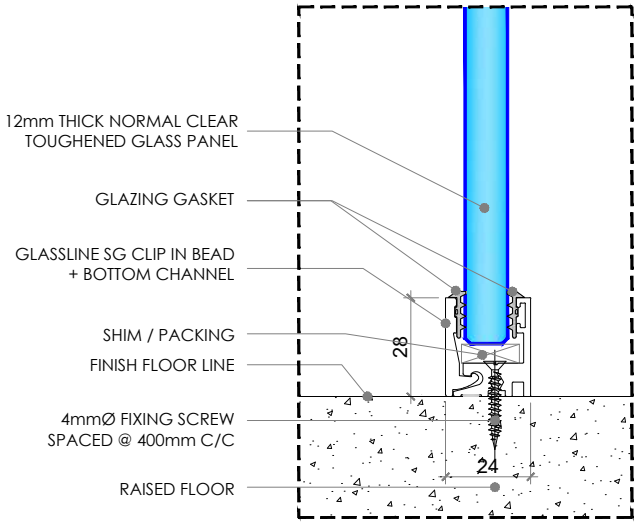

BOTTOM SECTION

TECHNICAL DATA SUMMARY

System Description:
Single Glazed Mullion-less Partition System


Profile Dimension:
Height - 28mm
Width - 24mm

Glass Specification:
12mm thick Clear Toughened Glass

Max Panel Sizes:
Height - 3000mm
Width - 1200mm **(subject to access)**

Profile Finish:
RAL Powder coated finish TBA by Client

Profile Grade:
Alloy - 6063
Temper - T6

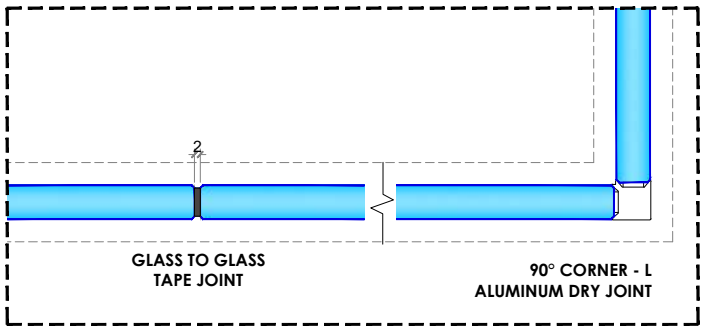

GLASS TO GLASS JOINTS


G24 - SINGLE GLAZED PARTITION

TECHNICAL DATA SHEET


DESCRIPTION

- GlassLine **G-24 Single glazed partition** using **13.14mm thick acoustic laminated glass** on 28x24mm Top & Bottom channels in tape glass to glass joint,
- Channels on Standard RAL powder coated finish (Exact RAL colour to be advised by client)
- Partition Height: 3000mm Maximum


Acoustic Rating: Rw38dB

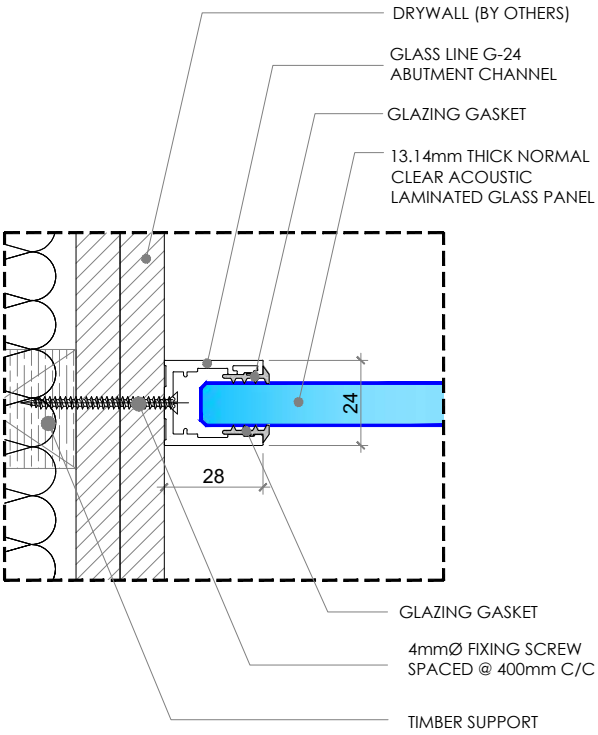

ABUTMENT TO DRYWALL

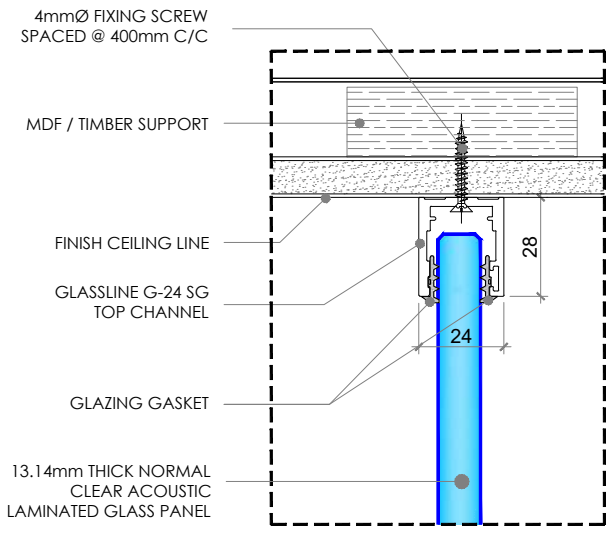

TOP SECTION

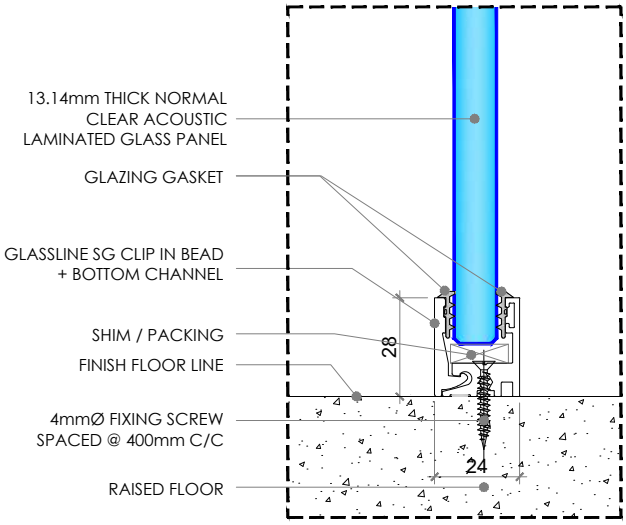

BOTTOM SECTION

TECHNICAL DATA SUMMARY

System Description:
Single Glazed Mullion-less Partition System


Profile Dimension:
Height - 28mm
Width - 24mm

Glass Specification:
13.14mm thick Clear Acoustic Laminated Tempered glass.

Max Panel Sizes:
Height - 3000mm
Width - 1200mm **(subject to access)**

Profile Finish:
Available in the range of Standard Powdercoated finishes

Profile Grade:
Alloy - 6063
Temper - T6

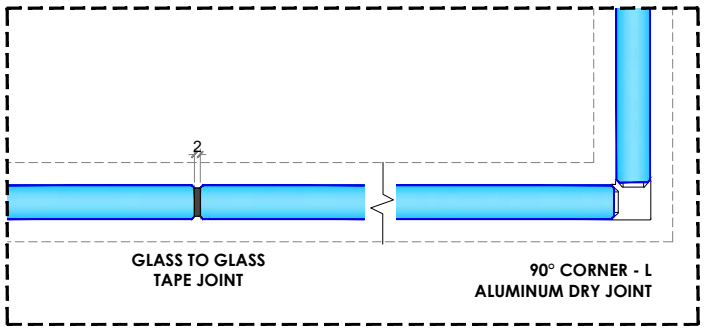

GLASS TO GLASS JOINTS