
# G55 -DOUBLE GLAZED PARTITION

TECHNICAL DATA SHEET


## DESCRIPTION

- Glassline **G-55 Double glazed partition** using **2 x12mm thick Normal Clear Tempered Glass** on 55x28mm top & bottom aluminum channels in tape glass to glass joint.
- Channels on RAL powder coated finish. (Exact colour to be advised)
- Partition Height: 3000mm H


## Acoustic Rating: Rw42dB

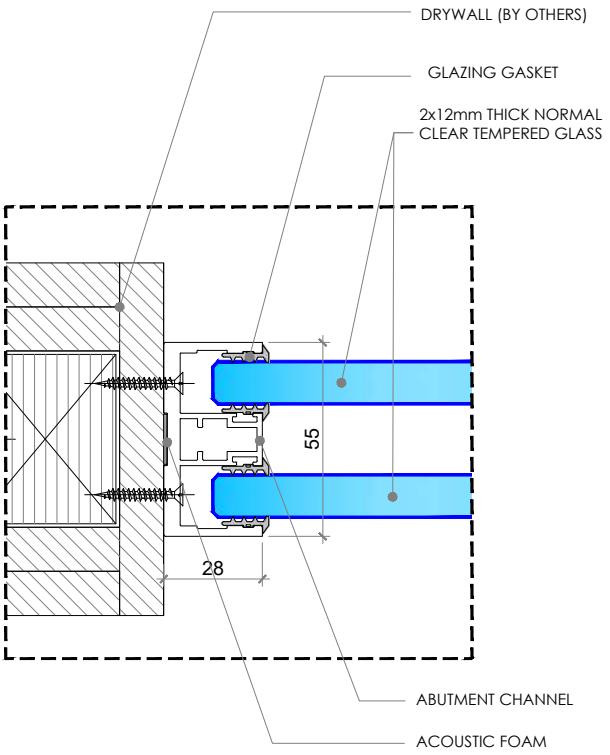


ABUTMENT TO DRYWALL

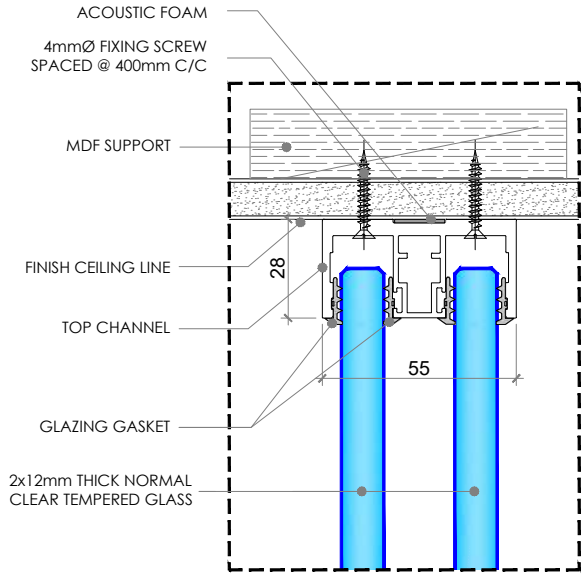


TOP SECTION

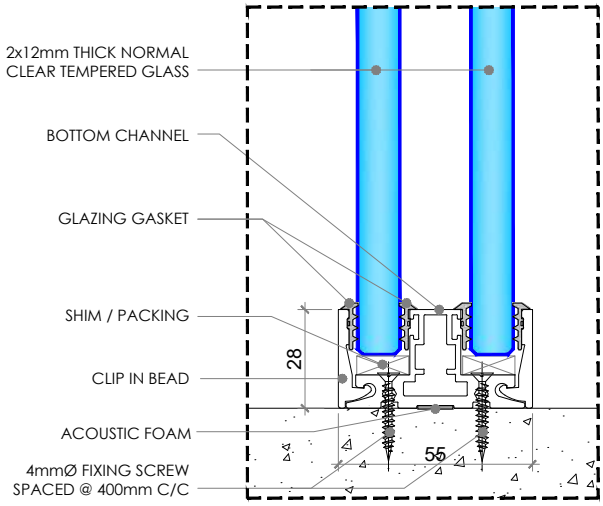


BOTTOM SECTION

### TECHNICAL DATA SUMMARY

**System Descriotion:**
Double Glazed Mullion-less Partition System


**Profile Dimension:**
Height - 28mm
Width - 55mm

**Glass Specification**:
2x12mm thick Normal Clear Tempered glass.

**Max Panel Sizes:**
Height - 3000mm
Width - 1200mm **(subject to access)**

**Profile Finish:**
RAL Powder coated finish / TBC

**Profile Grade:**
Alloy - 6063
Temper - T6

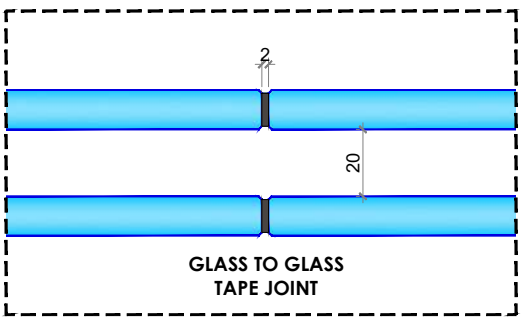


GLASS TO GLASS JOINT


# G55 -DOUBLE GLAZED PARTITION

TECHNICAL DATA SHEET


## DESCRIPTION

- Glassline **G-55 Double glazed partition** using **2 x13.14mm thick Normal Clear acoustic laminated Glass** on 55x28mm top & bottom aluminum channels in tape glass to glass joint.
- Channels on RAL powder coated finish
- Partition Height: 3000mmH (max height)


**Acoustic Rating: Rw46dB**

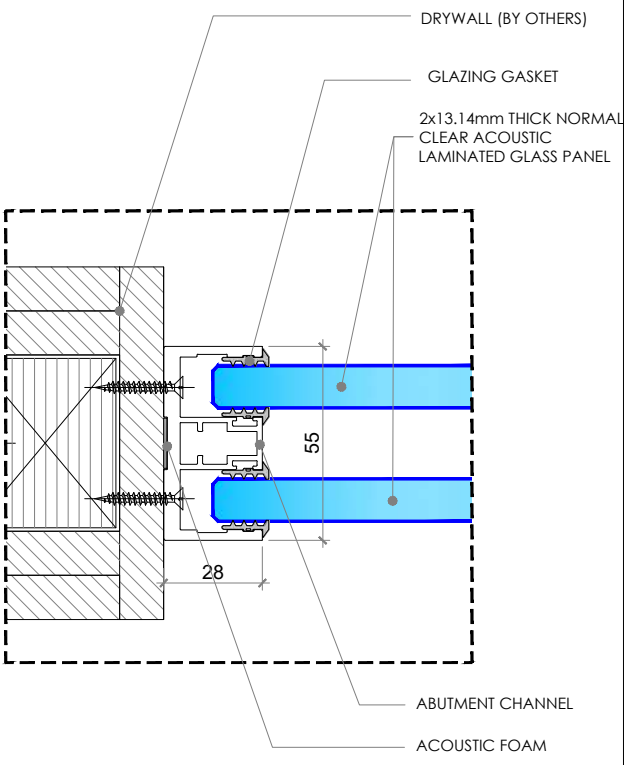


ABUTMENT TO DRYWALL

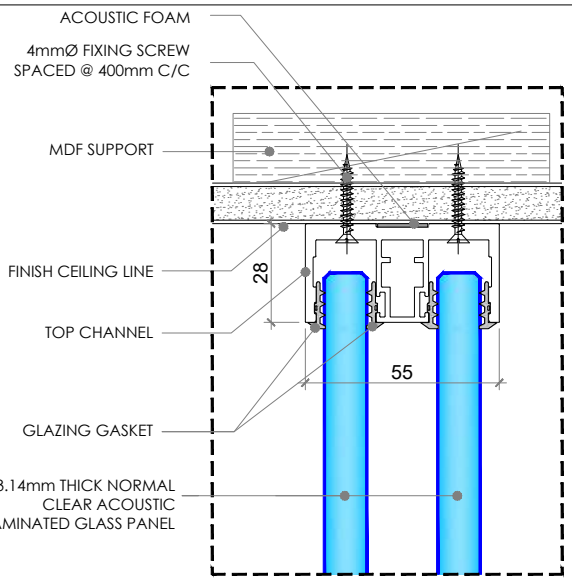


TOP SECTION

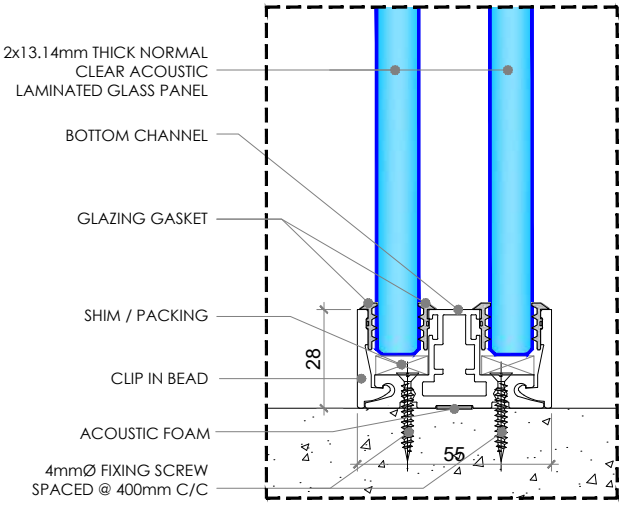


BOTTOM SECTION

**TECHNICAL DATA SUMMARY**

**System Descriotion:**
Double Glazed Mullion-less Partition System


**Profile Dimension:**
Height - 28mm
Width - 55mm

**Glass Specification**:
2x13.14mm thick Normal Clear Acoustic Laminated glass.

**Max Panel Sizes:**
Height - 3000mm
Width - 1200mm **(subject to access)**

**Profile Finish:**
RAL Powder coated finishes / TBC

**Profile Grade:**
Alloy - 6063
Temper - T6

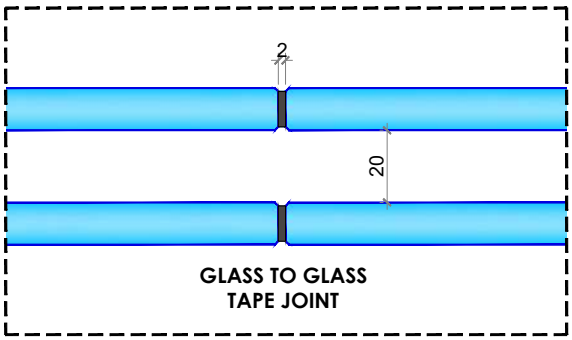


GLASS TO GLASS JOINT