
# GL SLEEK SINGLE GLASS DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line _ Sleek Single Glass Door using 12mm thick Normal clear toughened glass door panel with complete ironmongeries and accessories; GL pivot & Hinge, Floor spring with SSS cover plate , 1200mm Long H type pull handle, and oval door stop.
- Frames on RAL powder coated Finish /exact finish to be advised by client.
- Door Size: 1015mmWx 3000mmH

**Acoustic Rating: Rw33dB**

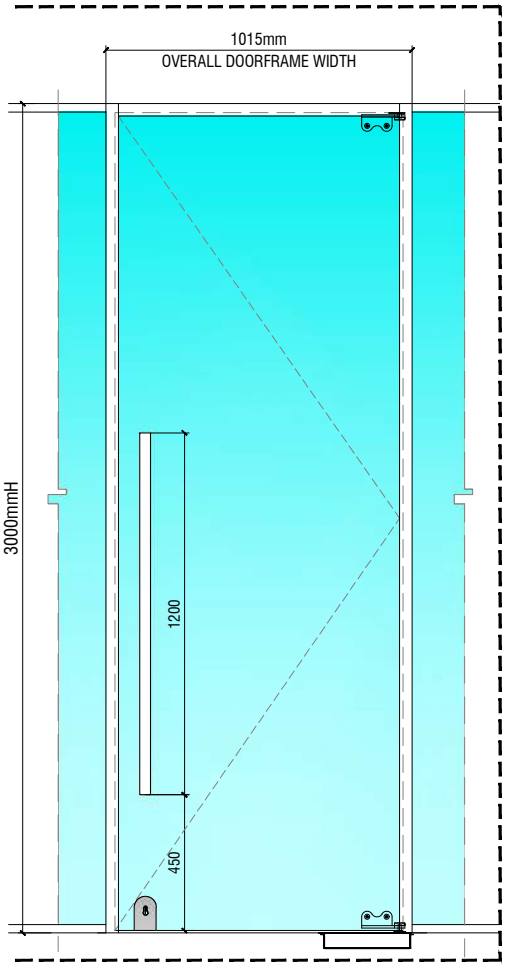


ELEVATION

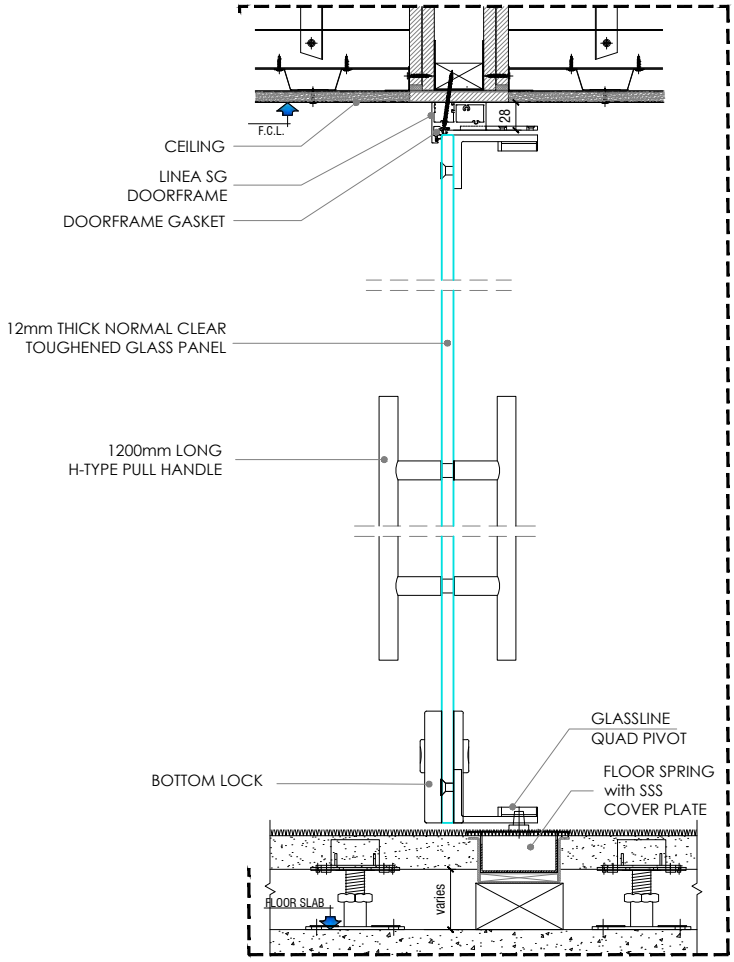


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - 3000mmH (max)
Width - Max 1015mm

**Glass Specification:**
12mm thick Clear Tempered glass.

**Ironmongeries:**
1200mm Long H-Type Pull handle
Bottom lock w/ cylinder
Oval door stop

**Profile Finish:**
Available in the range of Standard Powdercoated finishes

**Profile Grade:**
Alloy - 6063
Temper - T6

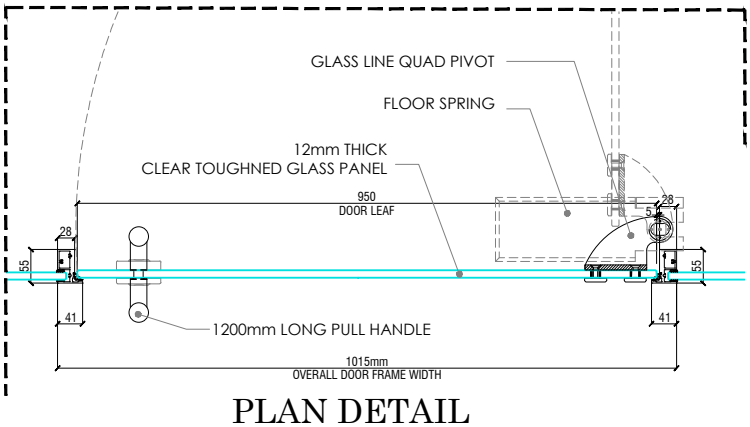


PLAN DETAIL


# LINEA SINGLE GLASS DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line _ Linea Single Glass Door using 12mm thick Normal Clear Toughened glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate, 1200mm long pull handle and oval door stop.
- Frames on RAL powder coated finish - Exact colour to be advised.
- Door Size: 1015mm W x 3000mm H

## Acoustic Rating: Rw35dB

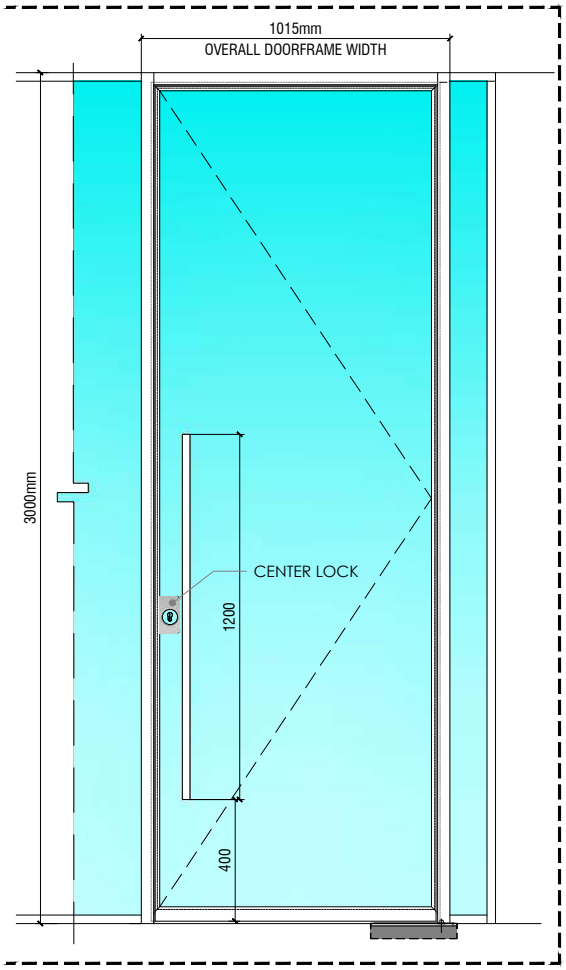


ELEVATION

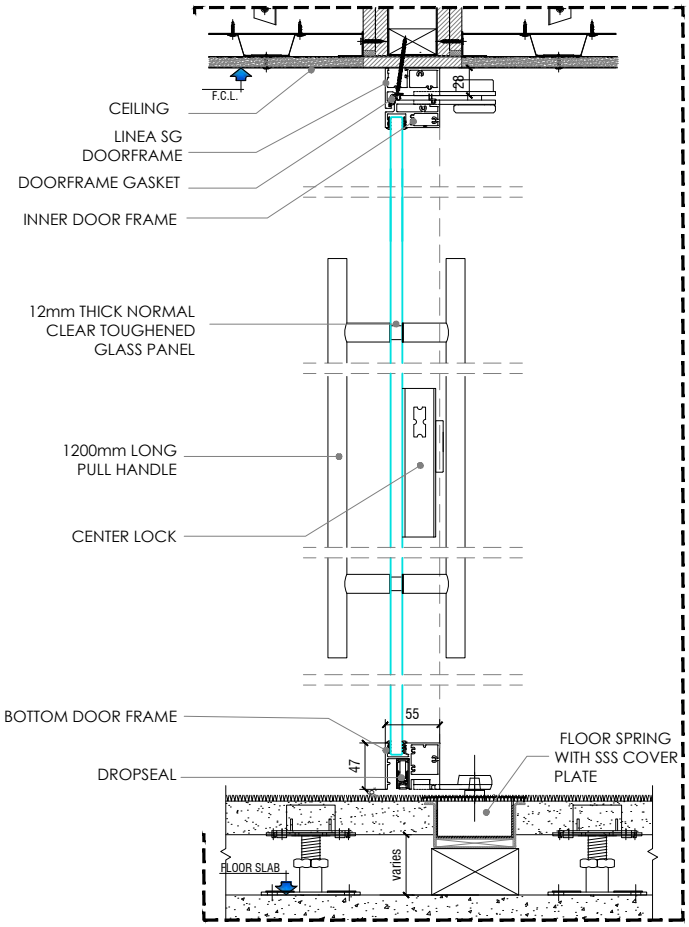


SECTION DETAIL

### TECHNICAL DATA SUMMARY


**Door Opening Size:**
Height - Max 3000mm
Width - Max 1015mm

**Glass Specification**:
12mm thick Normal Clear
Toughened Glass door panel.

**Ironmongeries:**
GL Strap Pivot
1200mm Long H-Type Pull handle
Oval door stop

**Profile Finish:**
Available in the range of Standard Powdercoated finishes

**Profile Grade:**
Alloy - 6063
Temper - T6

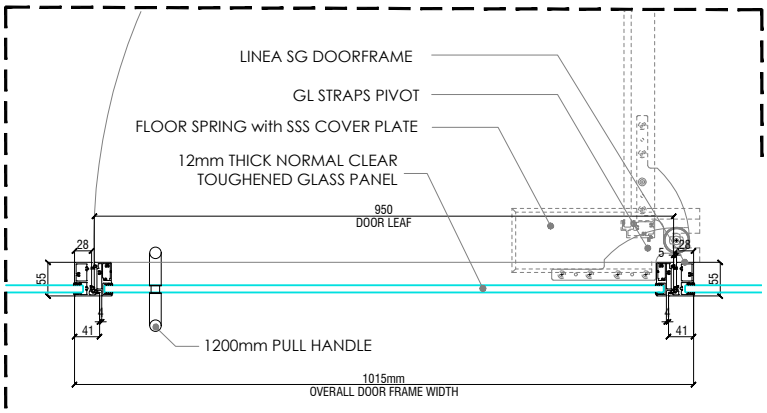


PLAN DETAIL


# LINEA SINGLE GLASS DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line _ Linea Single Glass Door using 13.14mm thick Normal Clear Toughened Laminated glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate, 1200mm long pull handle and oval door stop.
- Frames on RAL powder coated finish - Exact colour to be advised.
- Door Size: 1015mm W x 3000mm H

## Acoustic Rating: Rw37dB

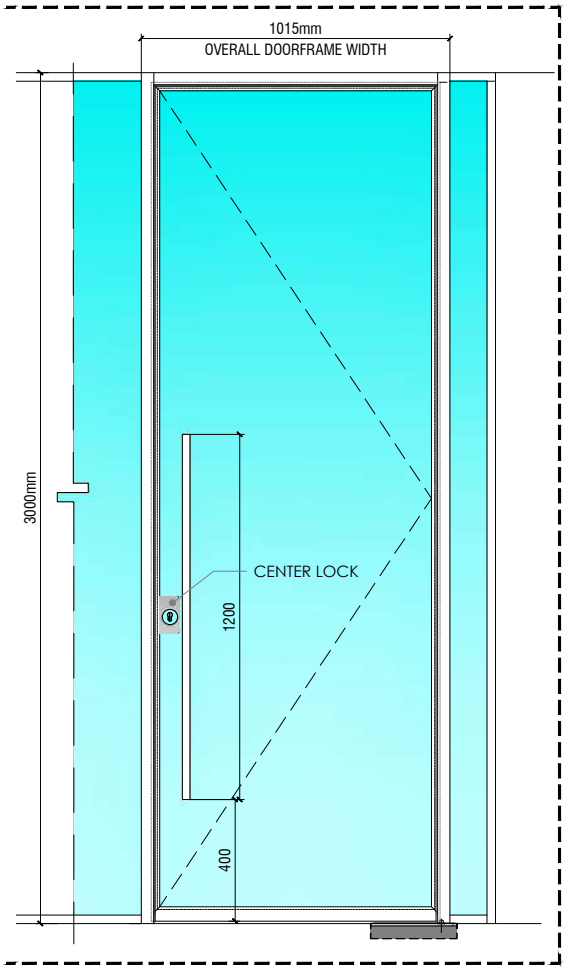


ELEVATION

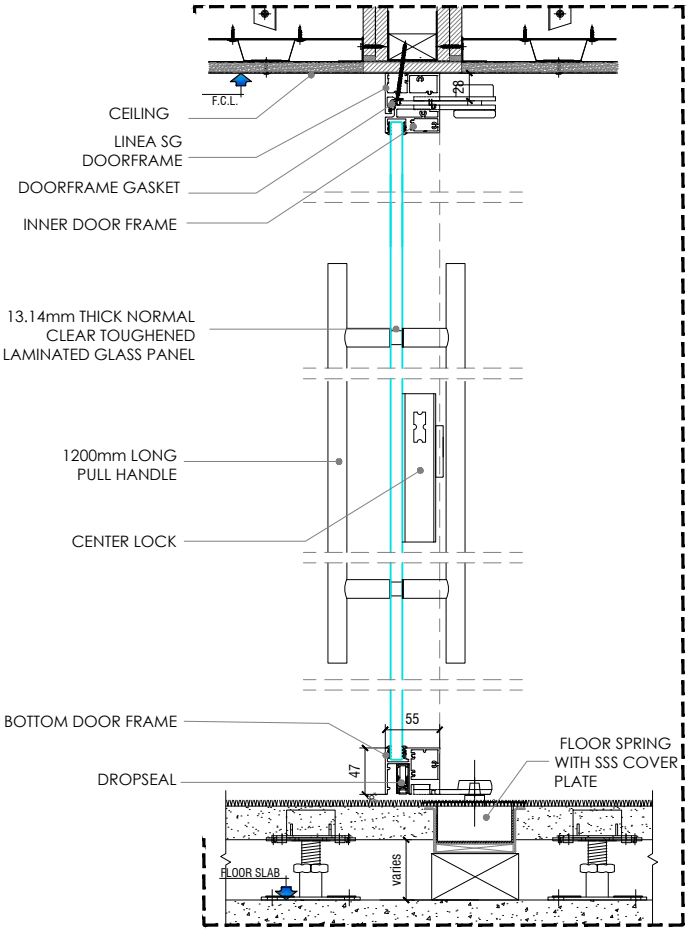


SECTION DETAIL

### TECHNICAL DATA SUMMARY


**Door Opening Size:**
Height - Max 3000mm
Width - Max 1015mm

**Glass Specification**:
13.14mm thick Normal Clear Toughened Laminated Glass.

**Ironmongeries:**
GL Strap Pivot
1200mm Long H-Type Pull handle
Oval door stop

**Profile Finish:**
Available in the range of Standard Powdercoated finishes

**Profile Grade:**
Alloy - 6063
Temper - T6

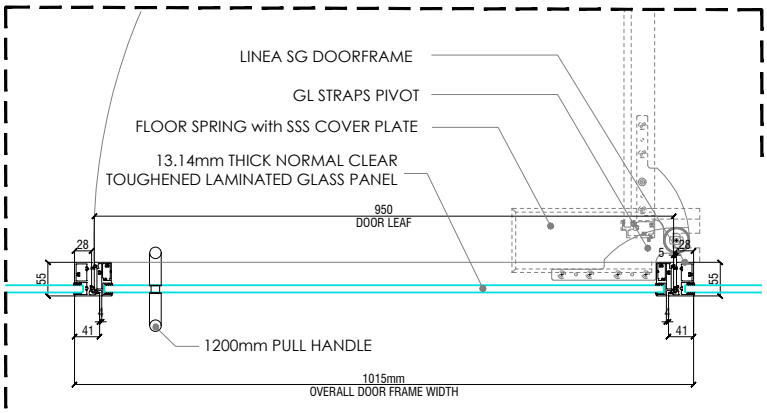


PLAN DETAIL

# LINEA SINGLE GLASS DOOR SINGLE LEAF


TECHNICAL DATA SHEET

## DESCRIPTION


Glass Line _ Linea Single Glass Door using 12mm thick Normal Clear Toughened glass door panel with complete ironmongeries and accessories; Floor spring with SSS cover plate, local lever handle with lock and europrofile cylinder and oval door stop.

- Frames on RAL powder coated finish to be advised by client
- Door Size: 1015mm W x 3000mm

**Acoustic Rating: Rw35dB**

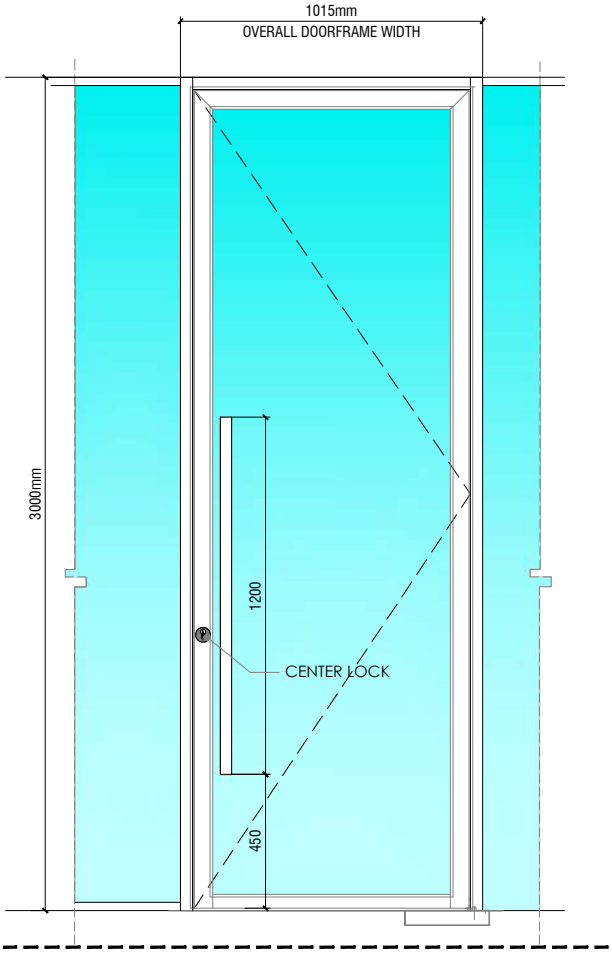


ELEVATION

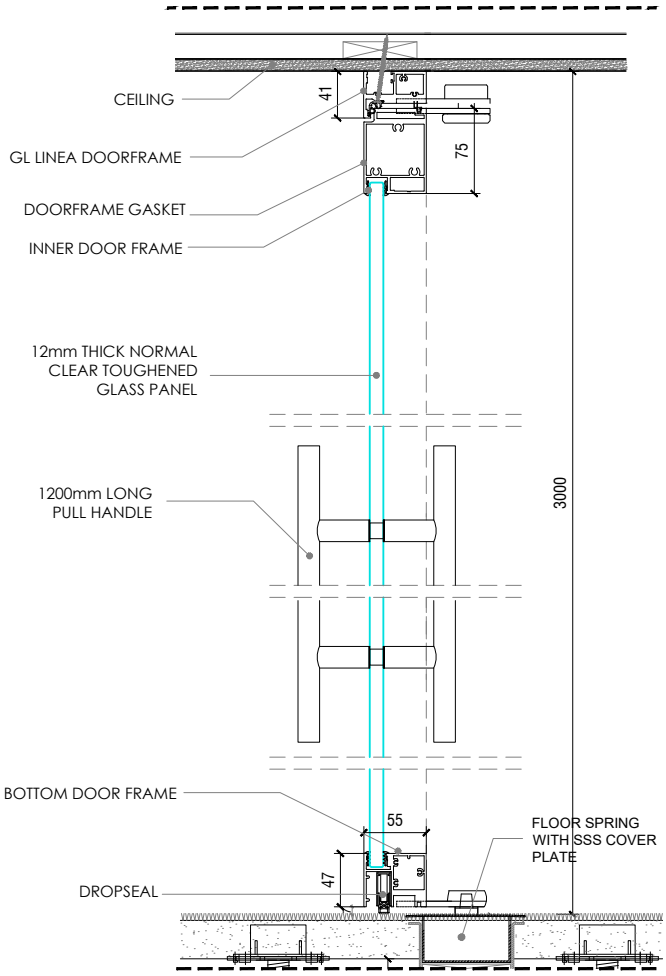


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - 3000mm
Width - 1015mm

**Glass Specification**:
12mm thick Normal Clear Toughened Glass panel.

**Ironmongeries:**
1200mm long pull handle
Floor Spring with SSS cover plate
Center lock with Europrofile cylinder
Escutcheon
Oval door stop

**Profile Finish:**
RAL Powder coated finish TBA

**Profile Grade:**
Alloy - 6063
Temper - T6

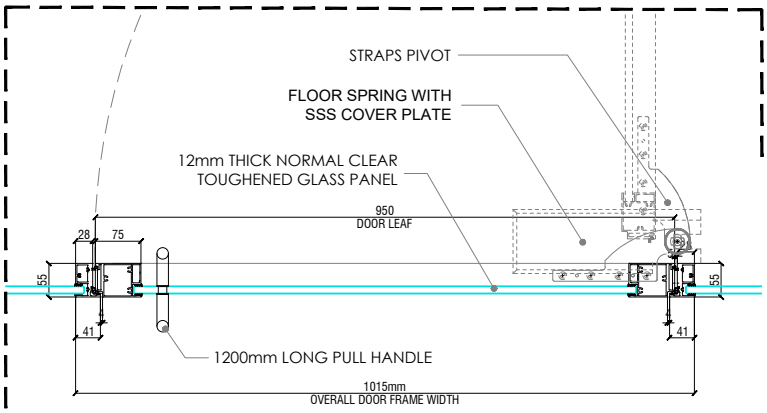


PLAN DETAIL


# LINEA SINGLE GLASS DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line _ Linea Single Glass Door using 13.14mm thick Normal Clear Toughened Laminated glass door panel with complete ironmongeries and accessories; Top & Bottom strap pivots, 1200mm long Pull handle, Floor spring with SSS cover plate center lock with europrofile cylinder and oval door stop.
- Frames on RAL powder coated finish to be advised by client
- Door Size: 1015mm W x 3000mm

**Acoustic Rating: Rw37dB**

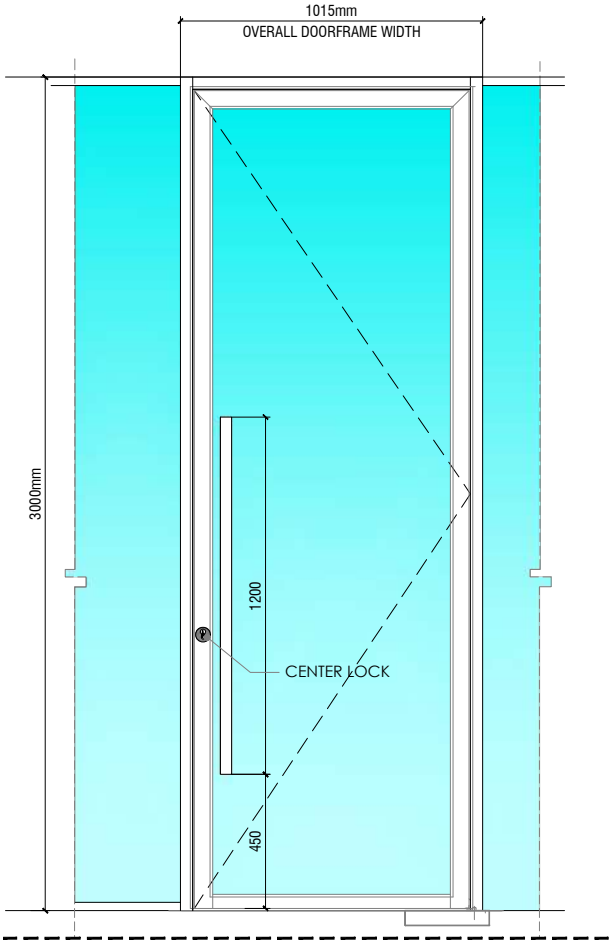


ELEVATION

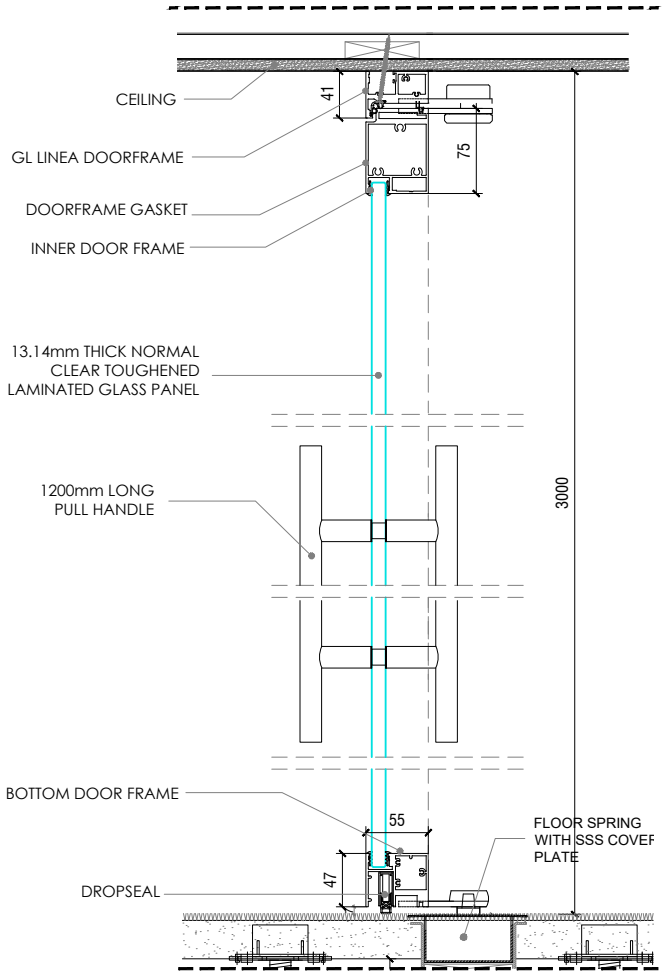


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - 3000mm
Width - 1015mm

**Glass Specification**:
13.14mm thick Normal Clear Toughened Laminated Glass panel.

**Ironmongeries:**
1200mm long pull handle
Floor Spring with SSS cover plate
Center lock with Europrofile cylinder
Escutcheon
Oval door stop

**Profile Finish:**
RAL Powder coated finish TBA

**Profile Grade:**
Alloy - 6063
Temper - T6

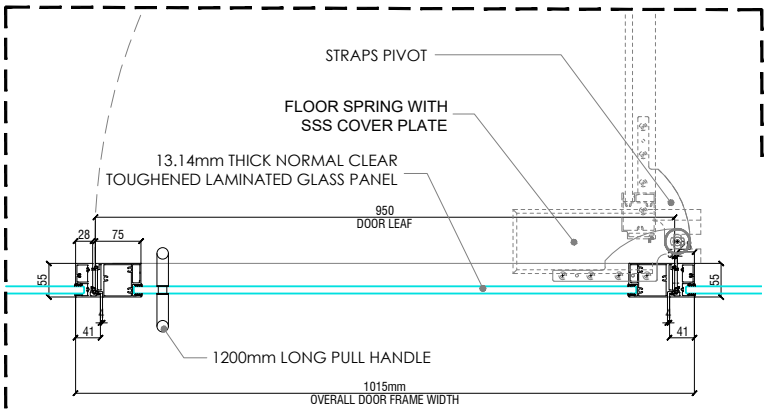


PLAN DETAIL


# LINEA DOUBLE GLAZED DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line Double Glazed Door using 8mm + 6mm thick normal clear toughened glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate , ZMCO 1200mm Long pull handle, Center Lock and oval door stop.
- Frames on RAL powder coated finish to be advised.
- Door Size: 1015mmWx 3000mm H

**Acoustic Rating: Rw39dB**

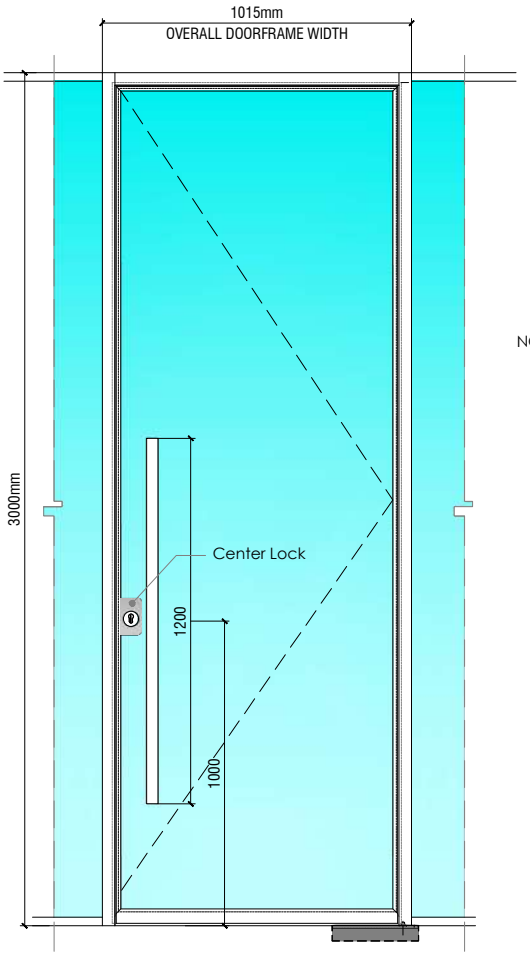



ELEVATION

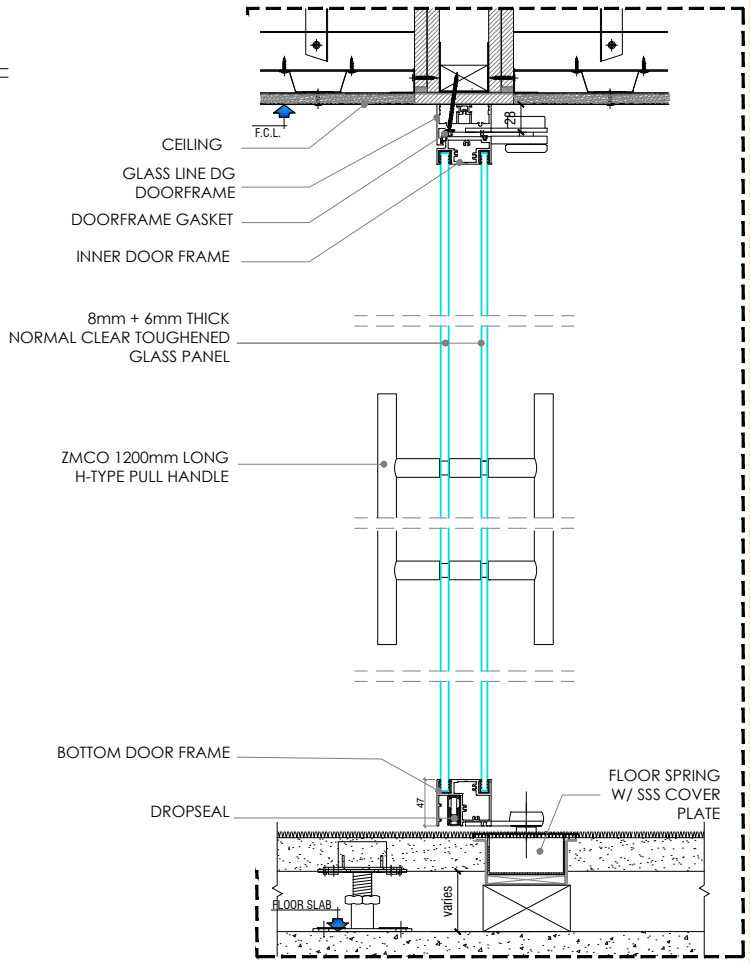


SECTION DETAIL

**TECHNICAL DATA SUMMARY**

**Door Opening Size:**
Height - 3000mm
Width - Max 1015mm
**Glass Specification:**
8mm+6mm thick Normal Clear Toughened glass.
**Ironmongeries:**
1200mm H-type Pull handle
Center lock w/ cylinder
Escutcheon
Oval door stop
**Profile Finish:**
RAL Powder coated finishes TBA
**Profile Grade:**
Alloy - 6063
Temper - T6

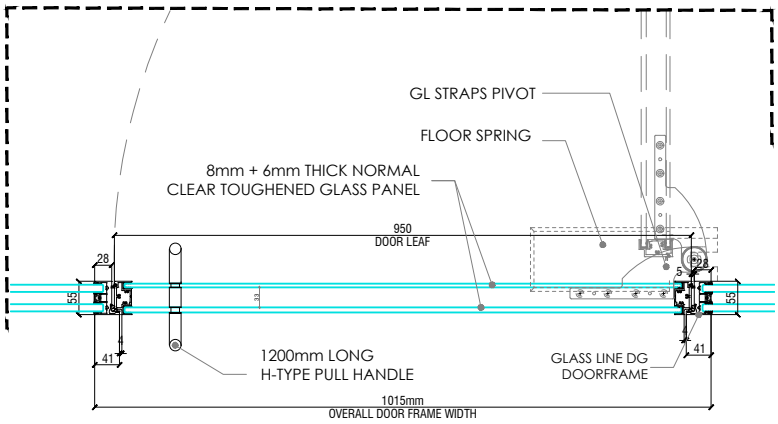


PLAN DETAIL


# LINEA DOUBLE GLAZED DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line Double Glazed Door using 6mm + 8mm thick Normal clear toughened glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate , 1200mm Long pull handle, and oval door stop.
- Frames on RAL powder coated finish to be confirmed
- Door Size: 1015mmWx 3000mmH (Max.)

## Acoustic Rating: Rw39dB

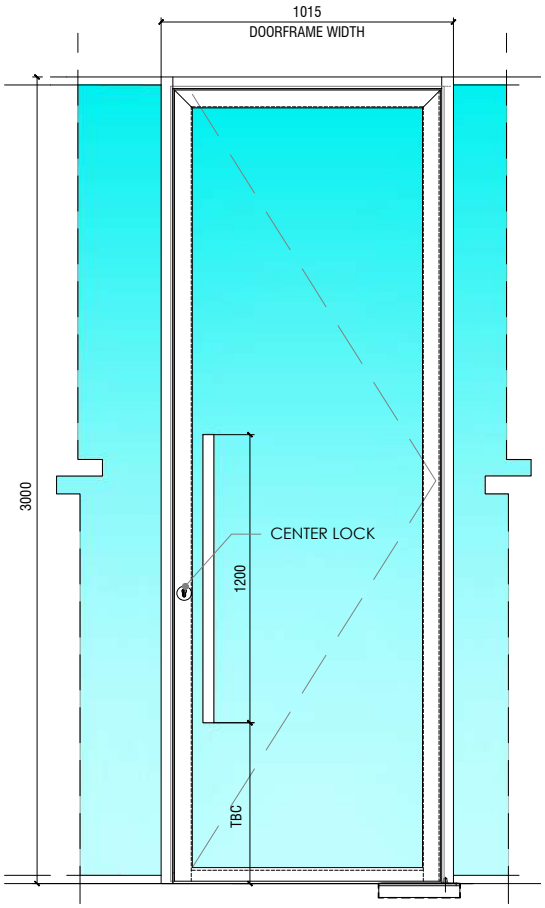


ELEVATION

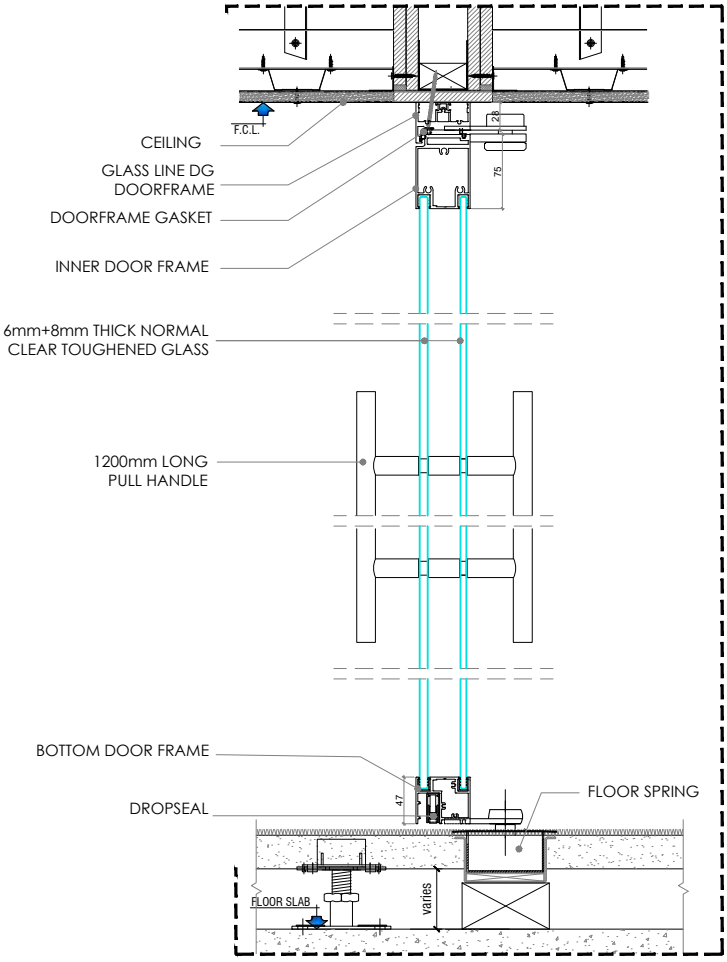


SECTION DETAIL

**TECHNICAL DATA SUMMARY**

**Door Opening Size:**

Height - 3000mm (Max.)

Width - 1015mm

**Glass Specification**:

6mm+8mm thick Normal Clear Tempered glass panel

**Ironmongeries:**


1200mm Long Pull handle
Center lock w/ cylinder
Escutcheon
Oval door stop

**Profile Finish:**

RAL Powder coated finish TBC

**Profile Grade:**

Alloy - 6063
Temper - T6

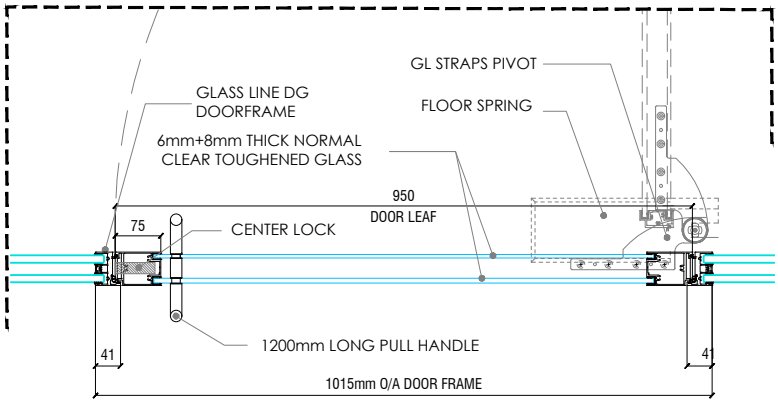


PLAN DETAIL


# LINEA DOUBLE GLAZED DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line Double Glazed Door using 8mm + 6mm thick clear toughened glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate , pull handle, and oval door stop.
- Frames on RAL powder coated finish (exact RAL colour to be advised by client).
- Door Size: 1071mmWx 3000mm H

**Acoustic Rating: Rw39dB**

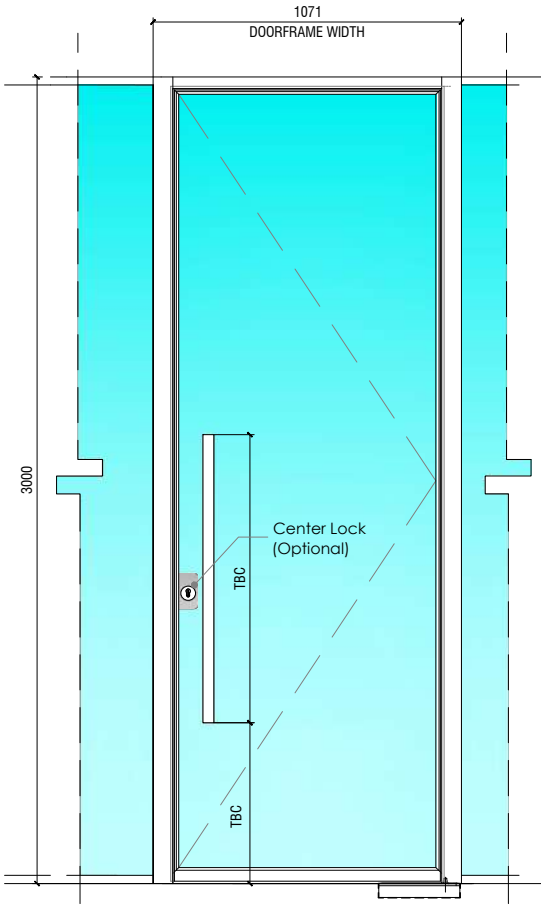


ELEVATION

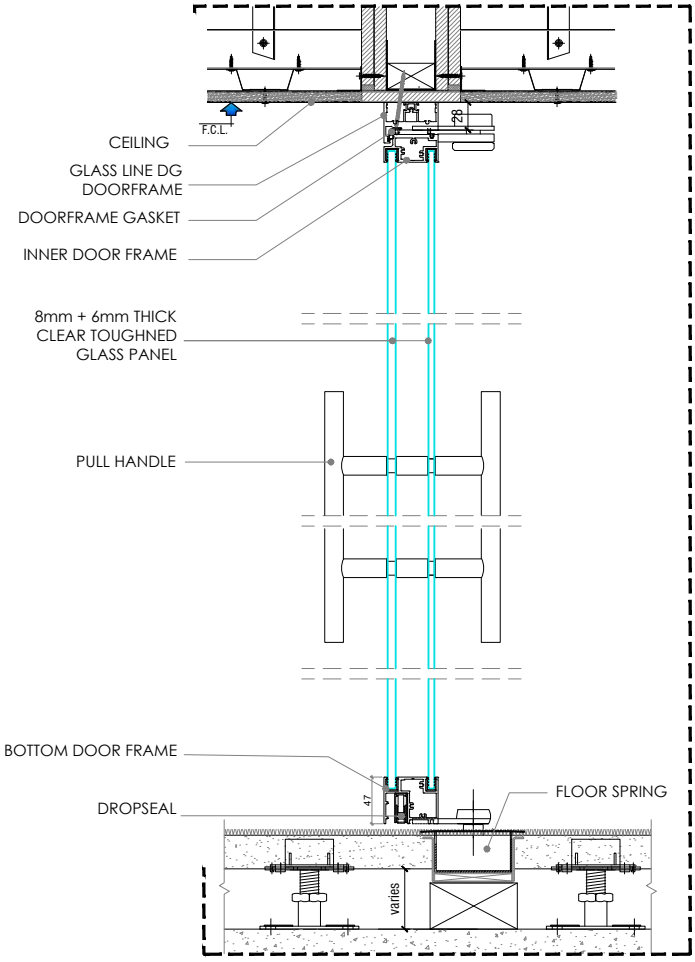


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - Max 3000mm
Width - Max 1071mm

**Glass Specification:**
8mm+6mm thick Clear Tempered glass.

**Ironmongeries:**
Pull handle (Length TBC)
Center lock w/ cylinder - Optional
Escutcheon
Oval door stop

**Profile Finish:**
Available in the range of Standard Powdercoated finishes

**Profile Grade:**
Alloy - 6063
Temper - T6

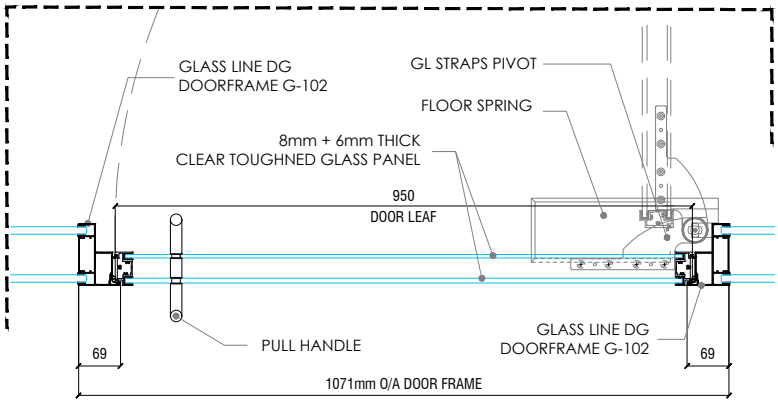


PLAN DETAIL


# LINEA DOUBLE GLAZED DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- Glass Line Double Glazed Door using 6mm + 8mm thick Normal clear toughened glass door panel with complete ironmongeries and accessories; 1200mm Long pull handle, Center Lock with Europrofile cylinder, Floor spring with SSS cover plate, and oval door stop.
- Frames on RAL powder coated finish exact colour to be advised by client.
- Door Size: 1071mmWx 3000mmH (Max.)

**Acoustic Rating: Rw39dB**

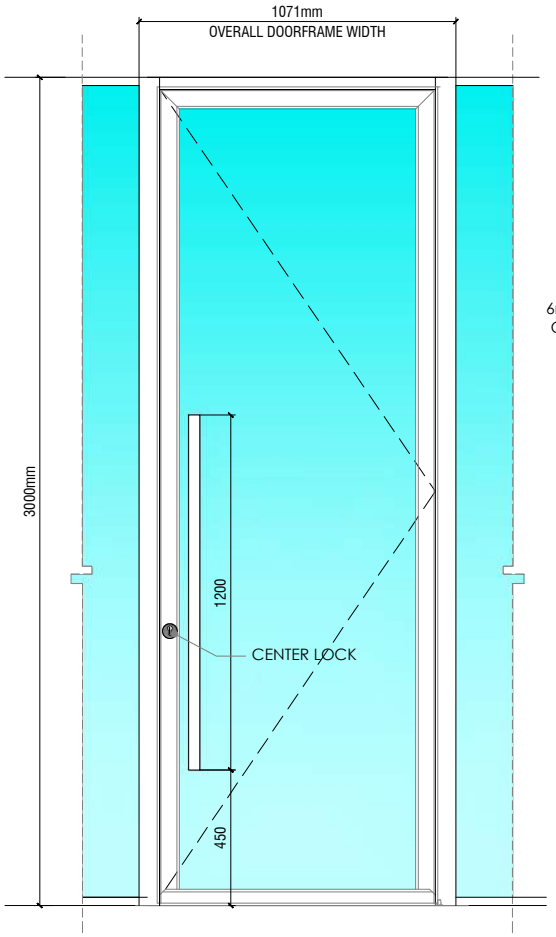


ELEVATION

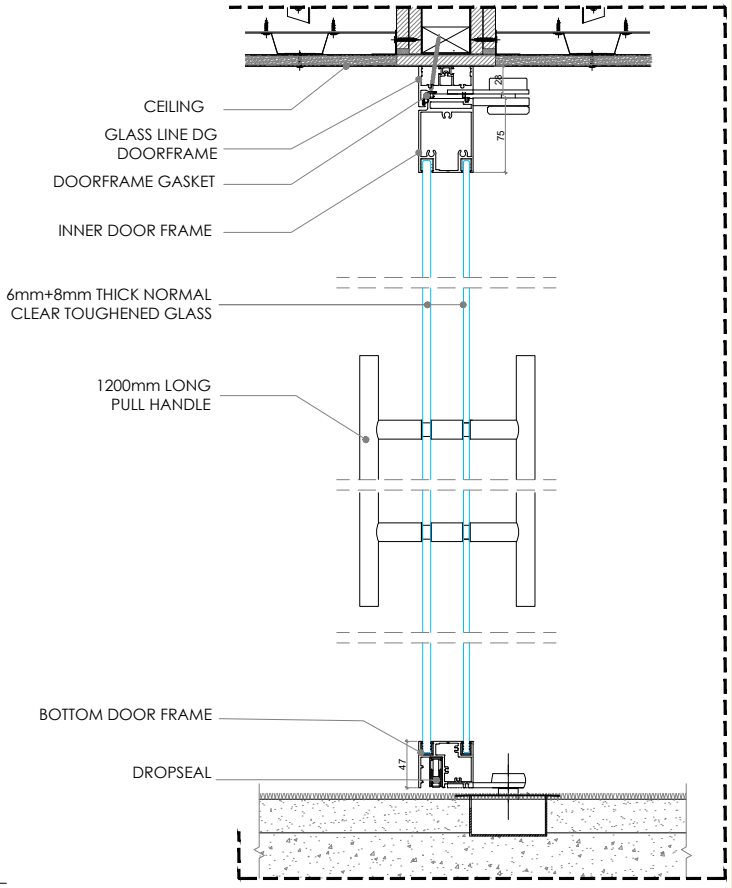


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - Max 3000mm
Width - Max 1071mm

**Glass Specification**:
6mm+8mm thick Normal Clear Tempered glass panel

**Ironmongeries:**
1200mm Long Pull handle
Center lock w/ cylinder
Escutcheon
Floor Spring with SSS cover plate
Oval door stop

**Profile Finish:**
RAL Powder coated finish TBC

**Profile Grade:**
Alloy - 6063
Temper - T6

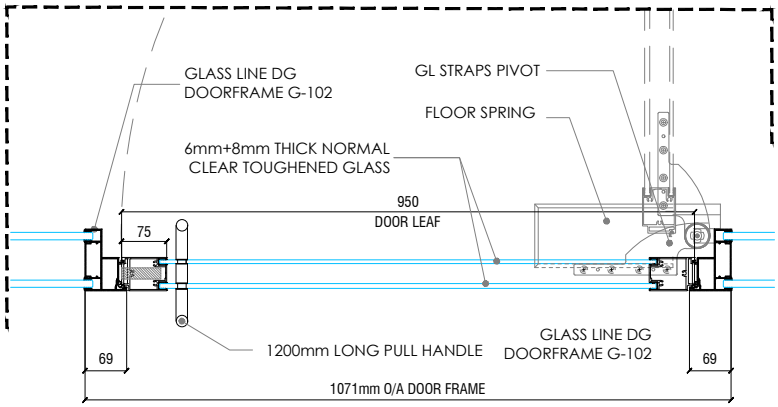


PLAN DETAIL


# LINEA PLUS DOUBLE GLAZED DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- GlassLine Linea Plus Double Glazed Door using 12mm + 8mm thick Normal clear toughened glass door panel with complete ironmongeries and accessories; GL straps pivot, Floor spring with SSS cover plate , 1200mm Long pull handle, and oval door stop.
- Frames on RAL powder coated finish to be confirmed
- Door Size: 1123mmW x 3000mmH (Max.)

## Acoustic Rating - 45dB

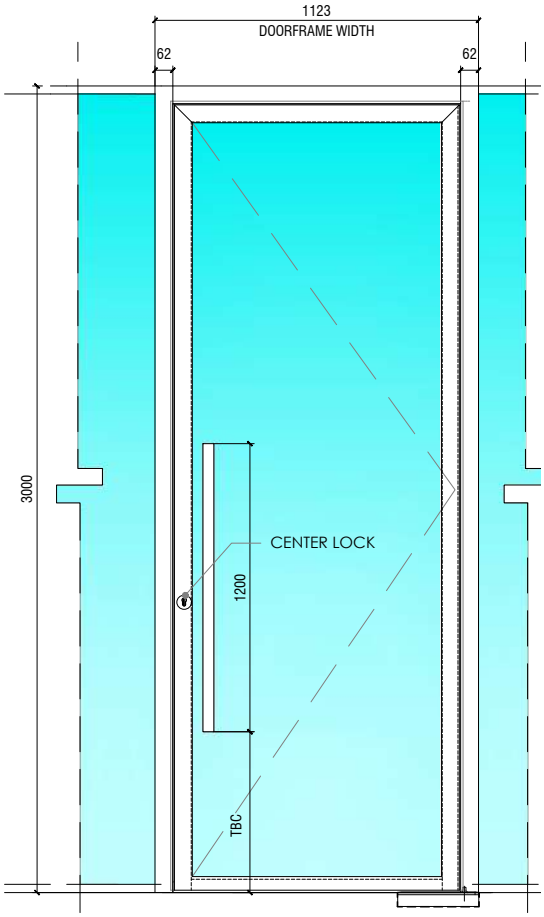


ELEVATION

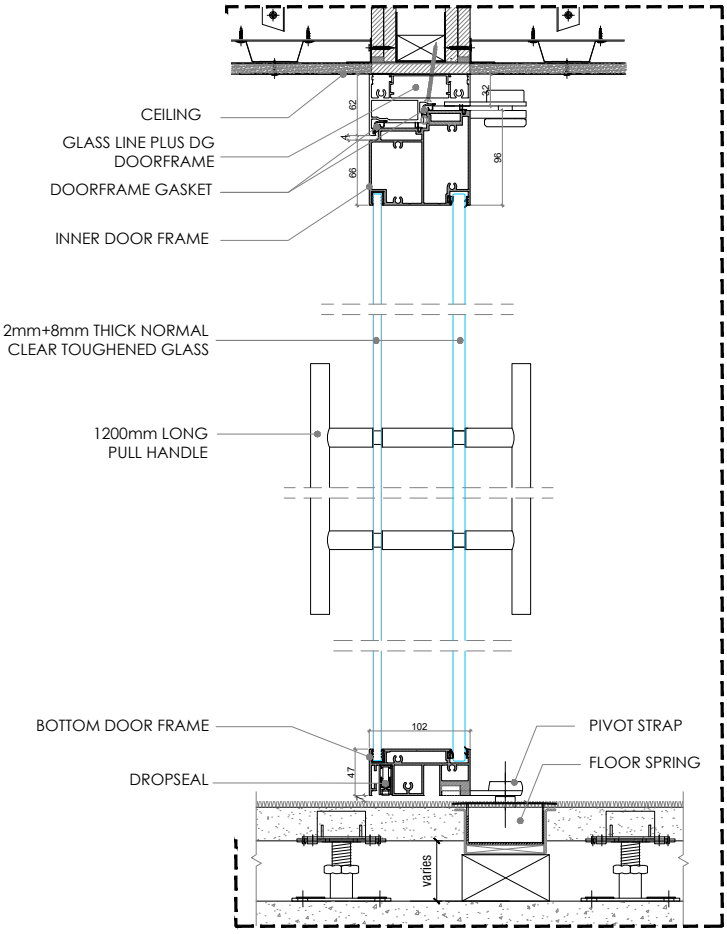


SECTION DETAIL

**TECHNICAL DATA SUMMARY**


**Door Opening Size:**
Height - 3000mm (Max.)
Width - 1123mm

**Glass Specification**:
12mm+8mm thick Normal Clear Tempered glass panel

**Ironmongeries:**
1200mm Long Pull handle
Center lock w/ cylinder
Escutcheon
Oval door stop

**Profile Finish:**
RAL Powder coated finish TBC

**Profile Grade:**
Alloy - 6063
Temper - T6

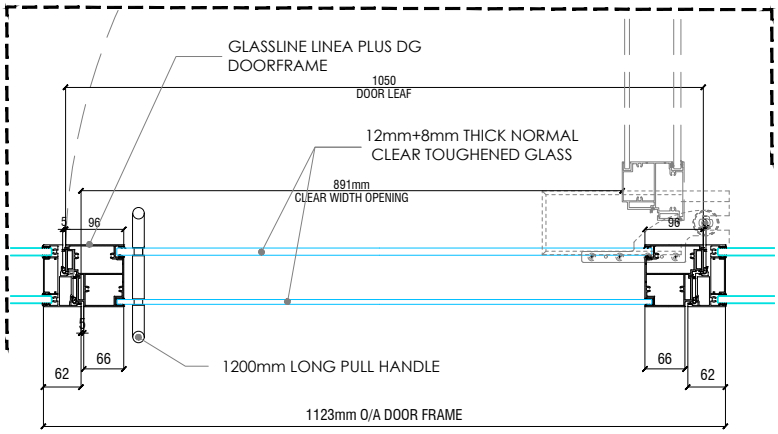


PLAN DETAIL


# GL MANUAL SLIDING DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- GL Manual Sliding Glass Door using 12mm thick Normal Clear Toughened glass door panel with complete ironmongeries and accessories; Sliding roller & rails, Hanging wheels, 1200mm long pull handle & bottom lock.
- Frames on RAL Powder coated finish. (to be advised)
- Door Size: 1000mmWx 3000mmH (max height)

## Acoustic Rating: Rw31dB

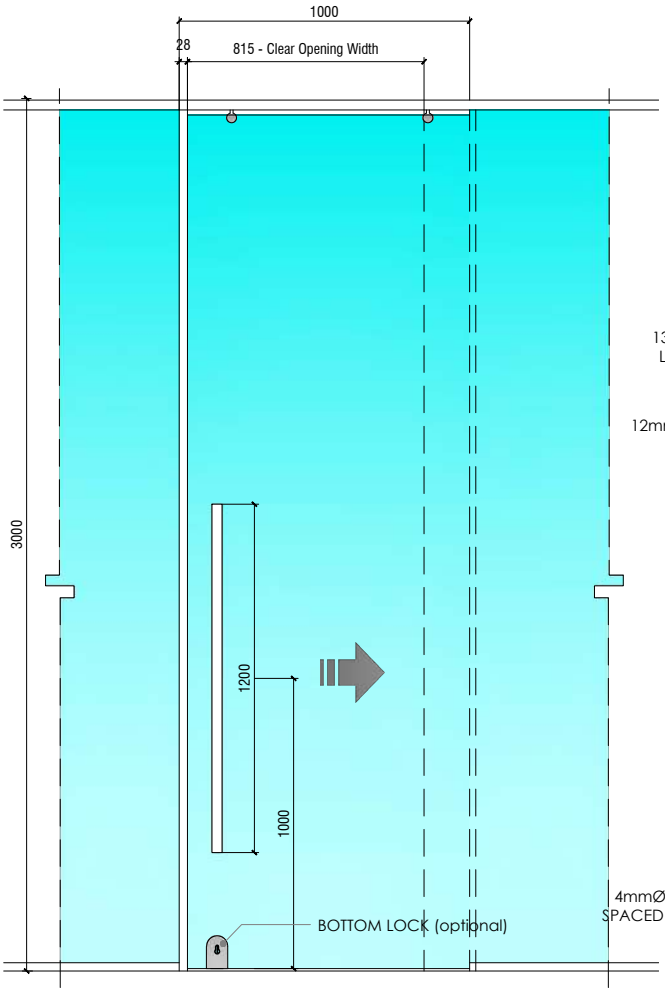



ELEVATION

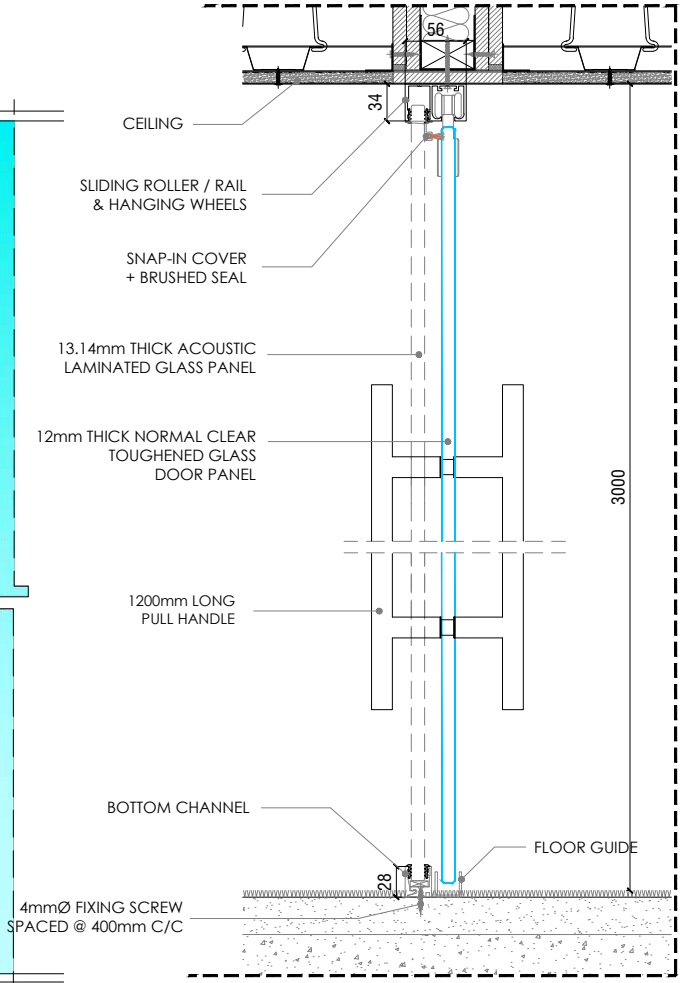


SECTION DETAIL

**TECHNICAL DATA SUMMARY**

**Door Opening Size:**
Height - Max 3000mm
Width - Max 1000mm
**Glass Specification:**
12mm thick Normal Clear Toughened Glass.
**Ironmongeries:**
Glass Clamp & Roller
1200mm Long Pull handle
Oval door stop
**Profile Finish:**
RAL P.C. Finis TBC
**Profile Grade:**
Alloy - 6063
Temper - T6

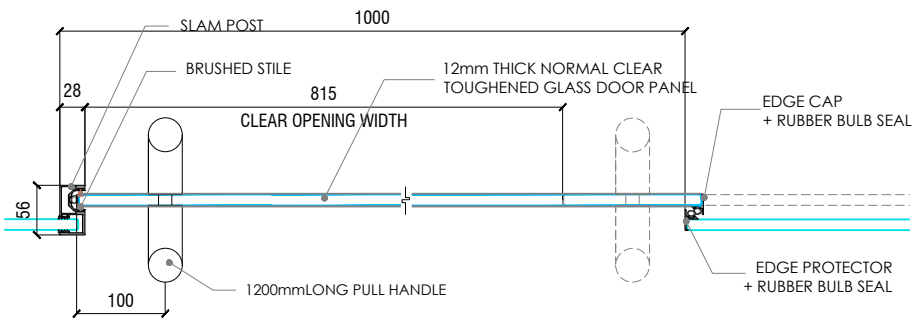


PLAN DETAIL


# GL POCKET SLIDING DOOR SINGLE LEAF

TECHNICAL DATA SHEET


## DESCRIPTION

- GL Pocket Sliding Glass Door using **12mm thick Clear Toughened glass** door panel with complete ironmongeries and accessories; Sliding roller & rails, Hanging wheels, 1200mm Long H type pull handle.
- Frames on RAL powder coated finish (exact RAL colour to be advised by client).
- Door Size: 1000mmWx 3000mmH (max. height)

## Acoustic Rating: Rw31dB

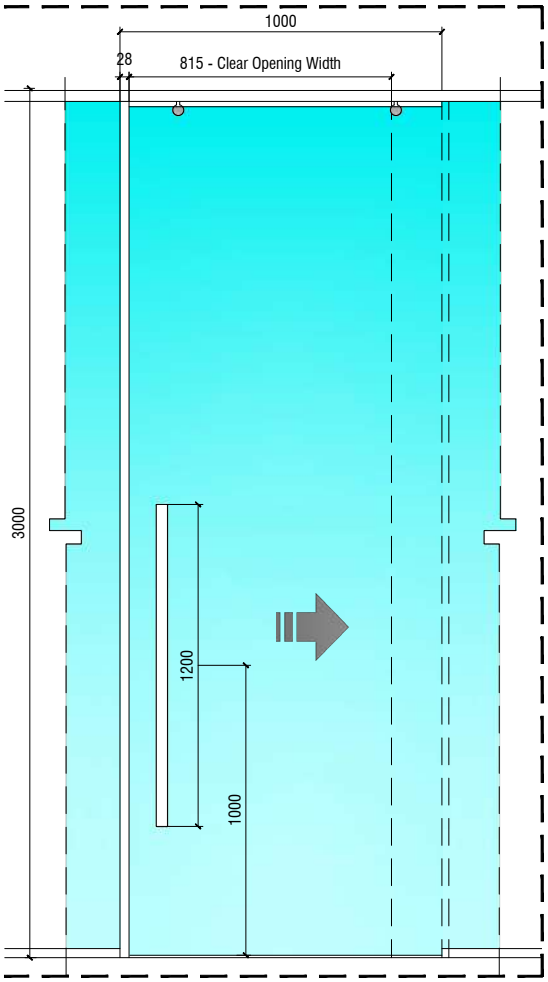


ELEVATION

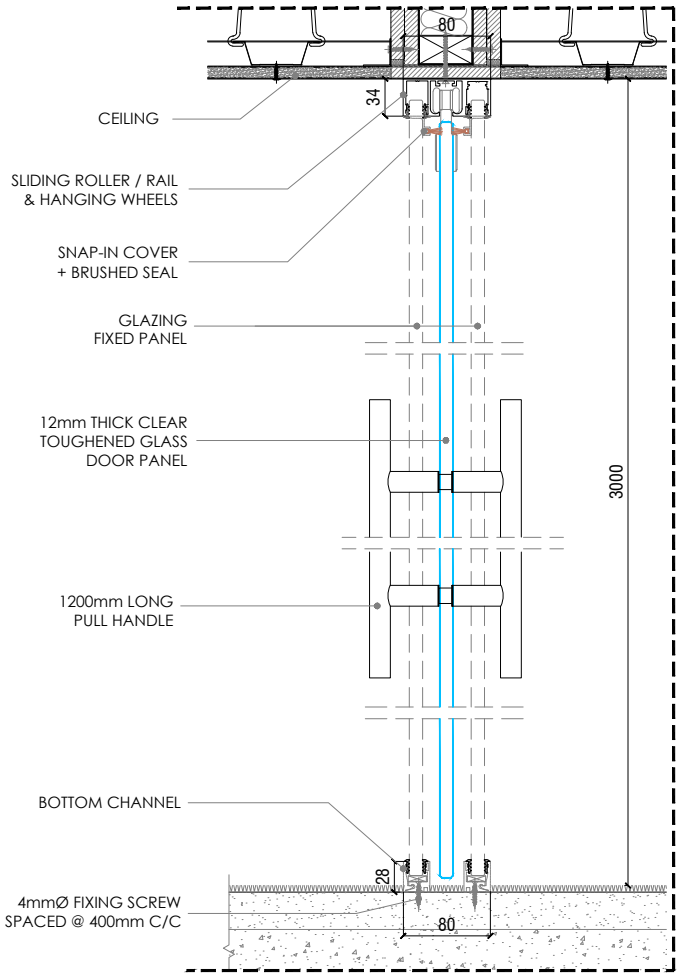


SECTION DETAIL

### TECHNICAL DATA SUMMARY


**Door Opening Size:**
Height - Max 3000mm
Width - 1000mm Standard

**Glass Specification**:
12mm thick Clear Toughened glass.

**Ironmongeries:**
1200mm Long H-Type Pull handle
Bottom lock - Optional
Guide

**Profile Finish:**
Available in the range of Standard Powder coated finishes

**Profile Grade:**
Alloy - 6063
Temper - T6

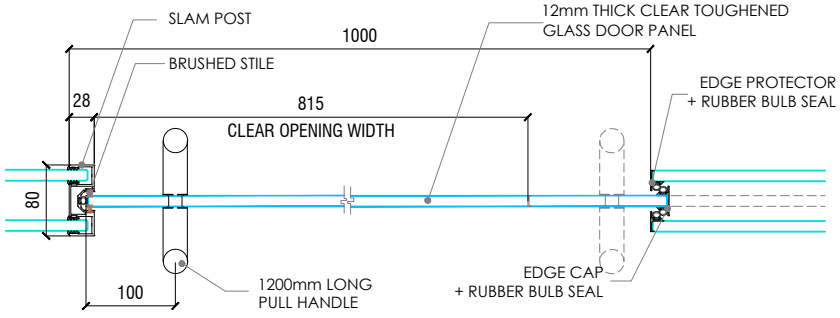


PLAN DETAIL